



Model Number

922LC5-A4N

Features

- Basic series
- 5 mm non-flush

Technical Data

General specifications

Switching element function		NPN	NO
Rated operating distance	s_n	5 mm	
Installation		non-flush	
Assured operating distance	s_a	0 ... 4.05 mm	

Nominal ratings

Operating voltage	U_B	4.75 ... 30 V DC
Switching frequency	f	0 ... 500 Hz
Voltage drop	U_d	≤ 1 V
Temperature drift		$\pm 15\%$
Operating current	I_L	0 ... 25 mA
No-load supply current	I_0	≤ 10 mA

Ambient conditions

Ambient temperature	-10 ... 65 °C (14 ... 149 °F)
---------------------	-------------------------------


Mechanical specifications

Housing material	Polyamides
------------------	------------

Approvals and certificates

CCC approval	CCC approval / marking not required for products rated ≤ 36 V
--------------	--

Dimensions

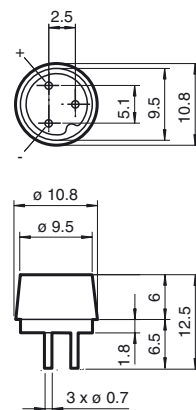

Electrical Connection

E / E0

